




MASON INDUSTRIES, Inc.
 Manufacturers of Vibration Control Products
 NY Mailing Address: PO Box 410, Smithtown, NY 11787
 350 Rabro Drive 2101 W. Crescent Ave., Suite D
 Hauppauge, NY 11788 Anaheim, CA 92801
 631/348-0282 714/535-2727
 FAX 631/348-0279 FAX 714/535-5738
 Info@Mason-Ind.com Info@MasonAnaheim.com

CERTIFIED FOR
JOB NAME :
CUSTOMER :
CUSTOMER P.O. :
MASON M.I. :
DWG. NO. :

TYPE
HD
 Double Deflection
 Neoprene Hangers

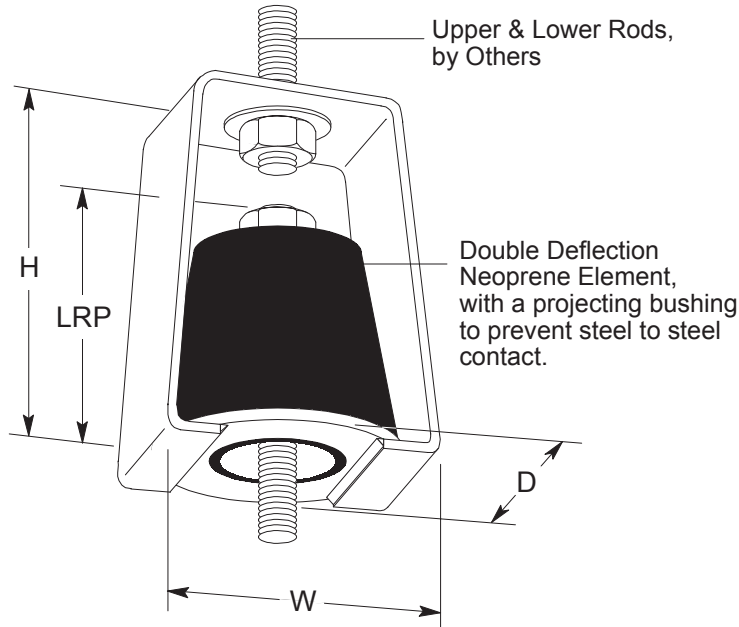

TYPE HD RATINGS

Size (Color Mark)	Durometer	Rated Capacity Range [lbs]	Max. Rated Deflection [in]
HD-Green	40	Up to 35	0.20
HD-White	60	35 - 75	0.20
HD-A-Black	30	Up to 45	0.35
HD-A-Green	40	30 - 75	0.35
HD-A-Red	50	60 - 125	0.35
HD-B-Red	50	Up to 235	0.40
HD-B-White	60	180 - 380	0.40
HD-B-Yellow	70	320 - 650	0.40
HD-BS-Blue	70	500 - 1000	0.40
HD-CS-Blue	70	1000 - 2100	0.40
HD-DS-Blue	70	2100 - 4200	0.40

Hanger elements have straight line deflection curves.

LRP - Lower Rod Penetration
 MRD - Maximum Rod Diameter

TYPE HD DIMENSIONS (inches)

Size	D	H	W	LRP	MRD
HD	1 3/4	2 1/4	1 7/8	1 1/4	3/8
HD-A	2	2 3/4	2 1/4	2 1/4	1/2
HD-B	3 1/4	4 1/2	4 1/4	3	3/4
HD-BS	3 1/4	4 1/2	4 1/4	3	3/4
HD-CS	3 1/4	5	4 1/4	3 1/4	7/8
HD-DS	4	6 1/4	4 3/4	3 1/4	7/8

CERTIFICATION DATA

TAG : _____
 UNIT : _____

PLAN VIEW OF HANGER LOCATION :



_____ inch SPECIFIED DEFLECTION

1 :	6 :
2 :	7 :
3 :	8 :
4 :	9 :
5 :	10 :
Material for One Set :	
Sets Required	

DWN : _____ CHKD: _____ DATE : _____

DWG NO. : _____